

# E-PRO 4



Direct LED replacement for 4" recessed incandescent. Save 85% in energy costs – 7.6 watt LED versus 50 watt 50R20 – and eliminate multiple lamp replacements over the 35,000 hour rated life.

## Performance

- Three finishes available for use with most 4" recessed cans
- Dimmable with most standard incandescent (triac) and low voltage electronic (ELV) dimmers for 5-100% light control
- Eliminate up to 14 lamps replacements - long life SMD LEDs last up to 35,000 hours, compared to incandescent lamps with a rated life of 2,500 hours
- Energy Star compliant, for use in damp locations

## Construction

- Aluminum heat sink sealed in heavy duty plastic housing
- Aluminum trim ring with durable powder coat finish
- Polycarbonate lens diffuses light



## Installation

- Fits most standard 4" recessed cans
- Requires 3-7/8" clearance inside 4" cans
- Compatible with AL4-ICAT airtight Type IC housing

## Photometrics

### EP4-E26-30-WH

|                   |        |
|-------------------|--------|
| Luminous flux     | 525Lm  |
| Maximum intensity | 243 cd |
| Input wattage     | 8W     |
| Lumens per watt   | 65 LPW |
| Beam angle        | 91.8°  |

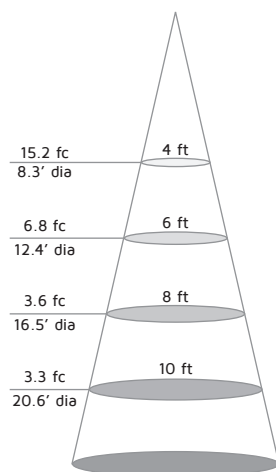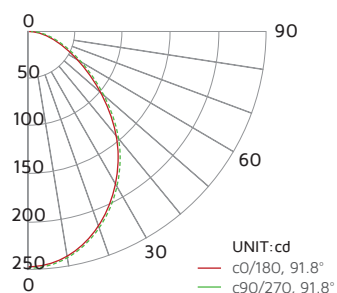

## Specifications

|                   |                                 |
|-------------------|---------------------------------|
| Series            | EP4                             |
| Input voltage     | 120V AC, 60Hz                   |
| Color temperature | 2700K / 3000K / 4000K           |
| CRI               | 81+                             |
| Wattage           | 7.6W                            |
| Lumens            | See individual product          |
| Beam angle        | 91.8° to 95.3°                  |
| Dimming           | Most triac and ELV dimmers      |
| Housing           | Aluminum                        |
| Lens              | Frosted polycarbonate           |
| Rating            | c/ETL/us Listed, damp locations |
| Dimensions        | 6-1/2" Dia. x 3-1/2"H           |
| Mounting          | Recessed                        |
| LED type          | 18 x SMD 2323 LEDs              |
| Rated life        | 35,000 hrs                      |

## EP4 Downlight



Dark Bronze

### EP4-E26-27-DB

7.6W / 432Lm / 2700K

### EP4-E26-30-DB

7.6W / 472Lm / 3000K



Brushed Steel

### EP4-E26-27-BS

7.6W / 456Lm / 2700K

### EP4-E26-30-BS

7.6W / 498Lm / 3000K



White

### EP4-E26-27-WH

7.6W / 480Lm / 2700K

### EP4-E26-30-WH

7.6W / 525Lm / 3000K

### EP4-E26-40-WH

7.6W / 550Lm / 4000K



### AL4-ICAT

4" 120V recessed housing for new construction Type IC, airtight

**AL-GU24** GU24 adaptor, sold separately for Title 24 compliance