

# E-PRO 5



Direct LED replacement for 5" conventional recessed lighting saving 85% in energy costs – 9.6 watt LED versus 65 watt 65BR30 – and eliminating multiple lamp replacements over its rated life.

## Performance

- Three finishes available for use with most 5" recessed cans
- Dimmable with most standard incandescent (triac) and low voltage electronic (ELV) dimmers for 5-100% light control
- Eliminate up to 14 lamps replacements - long life SMD LEDs last up to 35,000 hours, compared to incandescent lamps with a rated life of 2,500 hours
- Energy Star compliant, for use in damp locations

## Construction

- Aluminum heat sink sealed in heavy duty plastic housing
- Aluminum trim ring with durable powder coat finish
- Polycarbonate lens diffuses light



## Installation

- Fits most standard 5" recessed cans
- Requires 4" clearance inside 5" cans

## Photometrics

### EP5-E26-30-WH

Luminous flux	700Lm
Maximum intensity	327 cd
Input wattage	9.6W
Lumens per watt	72 LPW
Beam angle	95.4°

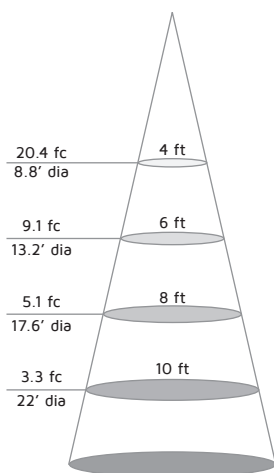

## Specifications

Series	EP5
Input voltage	120V AC, 60Hz
Color temperature	3000K
CRI	81+
Wattage	9.6W
Lumens	See individual product
Beam angle	95.4°
Dimming	Most triac and ELV dimmers
Housing	Aluminum
Lens	Frosted polycarbonate
Rating	c/ETL/us Listed, damp locations
Dimensions	6-1/2" Dia. x 3-1/2"H
Mounting	Recessed
LED type	22 x SMD 2323 LEDs
Rated life	35,000 hrs

## EP5 Downlight



### EP5-E26-30-DB

EP5 - Dark Bronze (3000K)  
9.6W / 630Lm



### EP5-E26-30-BS

EP5 - Brushed Steel (3000K)  
9.6W / 665Lm



### EP5-E26-30-WH

EP5 - White (3000K)  
9.6W / 700Lm

**AL-GU24** GU24 adaptor, sold separately for Title 24 compliance